



BIAS-TEES | BT

FEATURES


- **SMALL SIZE**
0.750 x 0.750 x .50 inch
- **WIDE BANDWIDTH**
10 to 8000 MHz
- **LOW LOSS**
0.5 db Max Typ. @ 3 Ghz



ELECTRICAL SPECIFICATIONS

Model NO.	1 Frequency Range (MHz)	Insertion Loss db(Max.)	2 Isolation J1-J3, J3-J2 db(Max.)	VSWR (Max.)	3 Input Power dBm(Max.)	4 DC Current ma(Max.)	Price \$ Qty.(1-9)
BT-A01	10-3000	0.50	40	1.15	1WCW	500	\$59
BT-A02	10-8000	1.0	30	1.30			
BT-A03	2000-18000	1.0					
BT-A04	500-4000	0.50					

1-Bandwidth Available to 20 GHz
 2-Higher Isolation Available.
 3-Up to 1000WCW Available.
 4-Up to 10A Available.
 Custom Design Available.
 Impedance 50 Ohm Nominal
 Temperature Range: -55 to +85°C
 Finish: Grey Paint per MIL-E-15090 Type II CL2

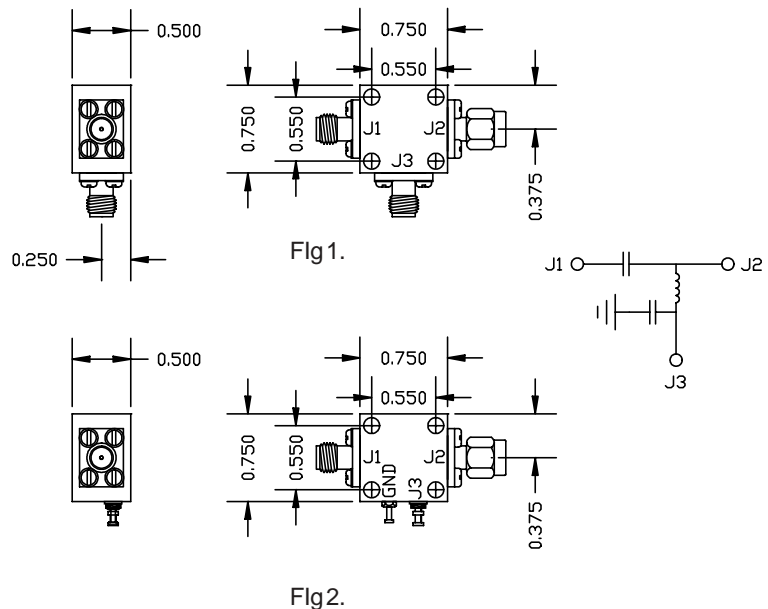

Unless Otherwise Noted:
 .XXX = ±0.010, .XX = ±0.020
 All dimensions are in inches
 Connectors: SMA Female J1 and J3, and SMA-Male J2 Per MIL-C-39012
 Mounting Holes Diameters: 0.104 ± .005
 Other Outline Available.

Specifications Subject to change without notice.

TAYLOR MICROWAVE, INC.

48 Industrial West, Clifton, NJ 07012 • Tel.(973)890-7763 • Fax.(973)890-7793