




APPLICATION			REVISION		
NEXT ASSY	USED ON	LTR	DESCRIPTION	DATE	APPROVED

SMA-FEMALE REMOVABLE 8 PLS.
0.015" X 0.10" LONG

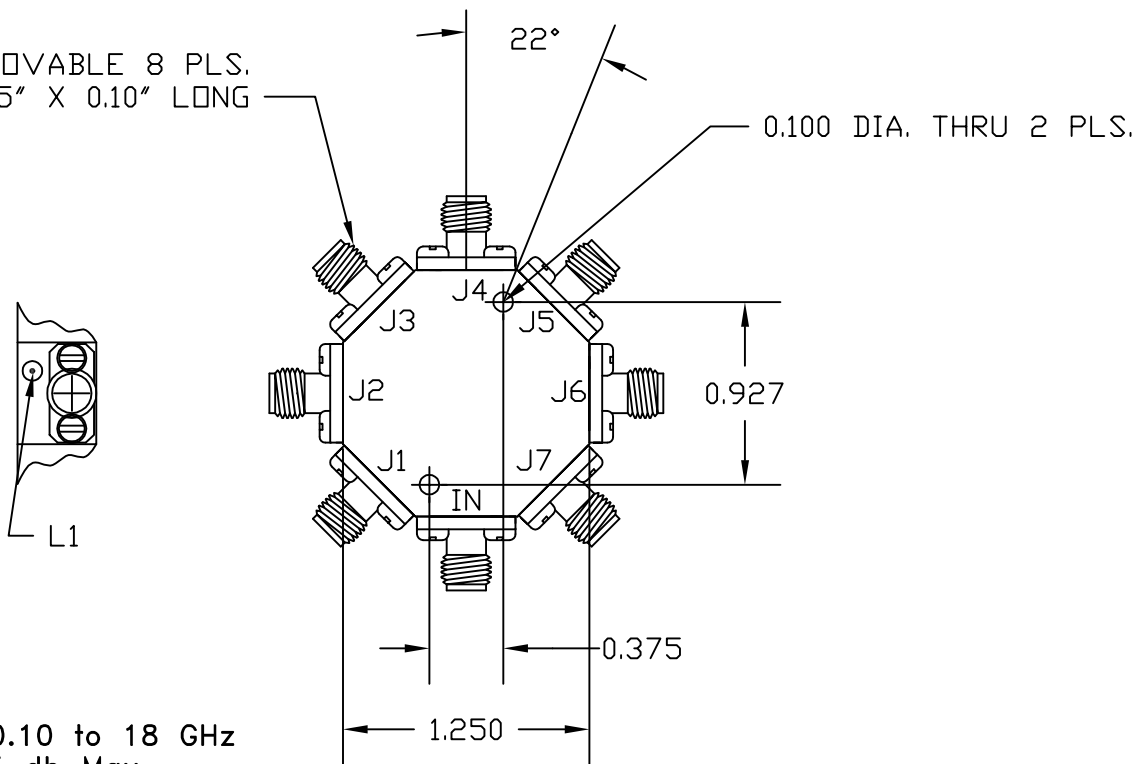

Specifications:
 Frequency Range: 0.10 to 18 GHz
 Insertion Loss: 4.25 db Max.
 Isolation: 60 db Min.
 Switching Speed: 250nsec Max. ON/OFF
 VSWR: 2:1 ON/OFF Max.
 Power Supply: +5V @ 150 ma
 -5V @ 65 ma
 Control: TTL "1": Isolation

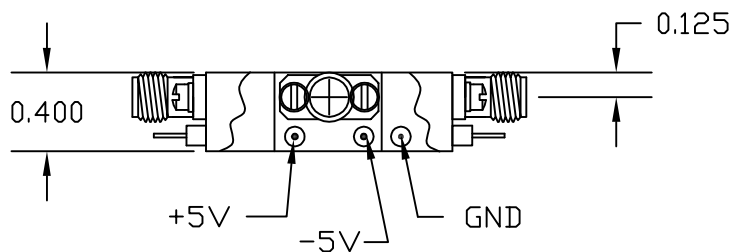

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.03 ± .XXX ±.01	CONTRACT NO.		 TAYLOR MICROWAVE, INC. 48 INDUSTRIAL WEST • CLIFTON, N.J. 07012
	APPROVALS	DATE	
MATERIAL 6061-T6 Aluminum	DRAWN	J.B.	5/06
	CHECKED		
FINISH GREY PAINT	E.E.	B.S.	5/06
DO NOT SCALE DRAWING	SIZE	CODE IDENT NO.	DRAWING NO.
	A	OE3Y7	SB7-A01-A-S
	SCALE	NONE	CAD 13
			SHEET 1 OF 1