




# 3 Way Power Divider

PD3T-52000

APPLICATION		REVISION			
NEXT ASSY	USED ON	LTR	DESCRIPTION	DATE	APPROVED

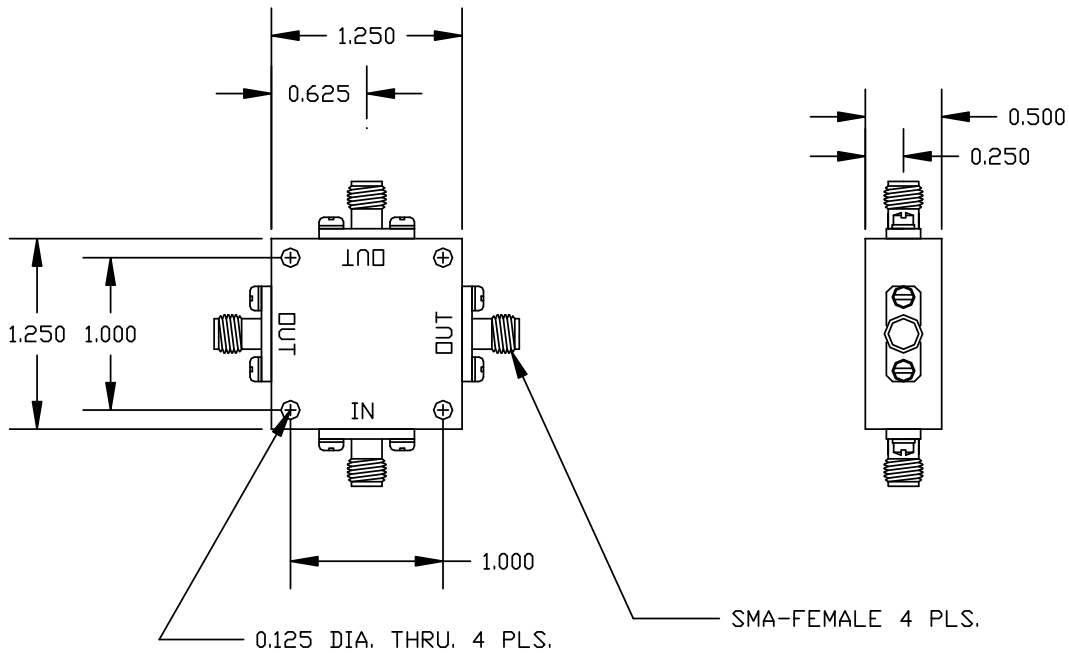

### Specifications

Frequency Range: 5 to 2000 MHz  
 Insertion Loss: 3 db Max.  
 VSWR: 1.7:1 Max.  
 Isolation: 15db Min.  
 Ampl. Balance: 0.30 db Max.  
 Phase Balance: 3 degree Max.  
 Input Power: 1WCW Max.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.03 ± XXX ±.01	CONTRACT NO.		<b>TAYLOR MICROWAVE, INC.</b> 48 INDUSTRIAL WEST • CLIFTON, N.J. 07012
	APPROVALS	DATE	
MATERIAL	DRAWN	J.B.	3/17
	CHECKED		
FINISH GRAY PAINT	E.E.	B.S.	3/17
DO NOT SCALE DRAWING	SIZE	CODE IDENT NO.	DRAWING NO.
	A	0E3Y7	PD3T-52000
	SCALE	NONE	CAD 13 SHEET 1 OF 1

## TAYLOR MICROWAVE, INC.

48 Industrial West, Clifton, NJ 07012 • Tel.(973)890-7763 • Fax.(973)890-7793

