


APPLICATION			REVISION		
NEXT ASSY	USED ON	LTR	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS:

Frequency Range: 100KHz to 2 GHz
Insertion Loss: 1.75 db Max. typ. 1.0 db
VSWR: 1.5:1 Max.
Temp. Range: -55 to +71 degree C.
DC Power: 50V @ 20 AMPS Max Typ.
RF Power: 10W Max. see below
Isolation: 50 db Min.
Bias Port to RF OUT Frequency Range
3 db point DC to 800Hz

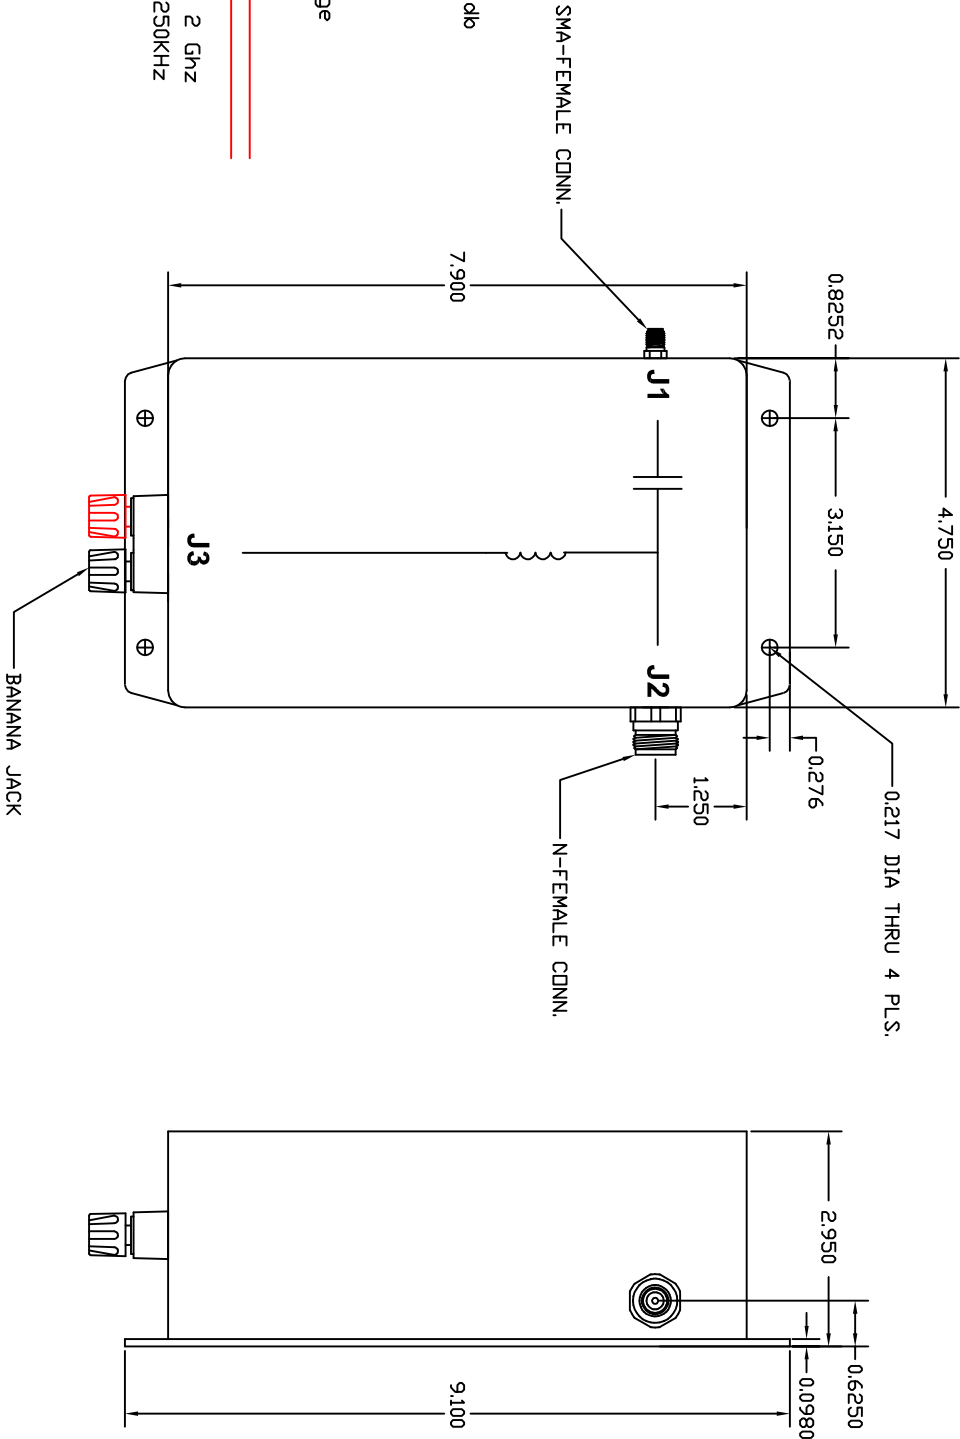

RF Power: 10W Max. from 250 KHz to 2 Ghz
RF Power: 2W Max. from 100 KHz to 250KHz

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.03 ± XXX ±.01	CONTRACT NO.		 TAYLOR MICROWAVE, INC. 14250 S.W. 23rd LANE, MIAMI FL 33175			
	APPROVALS	DATE				
	DRAWN J.B.	7/26	High Current Bias Tee			
	CHECKED					
	E.E. B.S.	7/26				
MATERIAL			SIZE CODE IDENT NO. DRAWING NO. A OE3Y7 BT-HC01			
FINISH						
GREY PAINT						
DO NOT SCALE DRAWING			SCALE NONE	CAD 10	SHEET 1	OF 1